

Old Vienna with paver-shield™

Now with paver-**shield**™ technology; this antique clay surface will bring a beautiful look and feel to borders, edging, inlays and anywhere you feel creative!



Inlays | Borders | Circles




Proud Distributor

WOODWARD
Landscape Supply



Old Vienna with paver-shield™

	WIDTH	LENGTH	THICKNESS	SF/PALLET	PCS/PALLET	LBS/PALLET
A	2¾"	7½"	2¾"	55	425	1,554



AUTUMN BLEND*



BROWN



FIRE ISLAND BLEND




RAVEN*


*Premium Color



CROSS-SECTION OF TYPICAL INSTALLATION

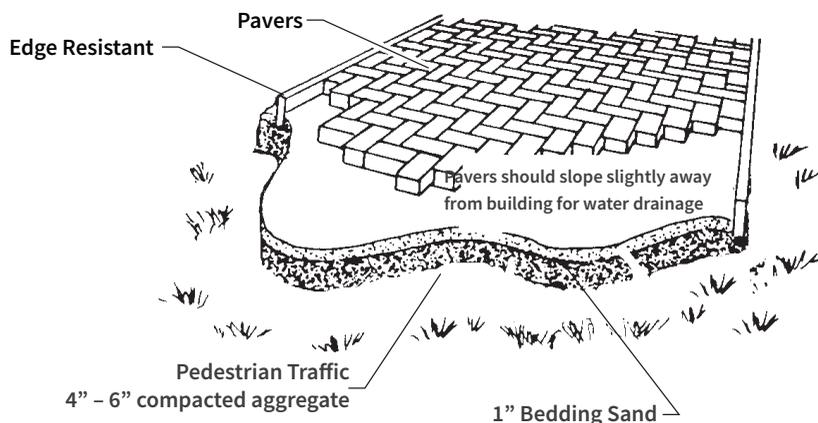

NICOLock PAVING STONE 1\"/>

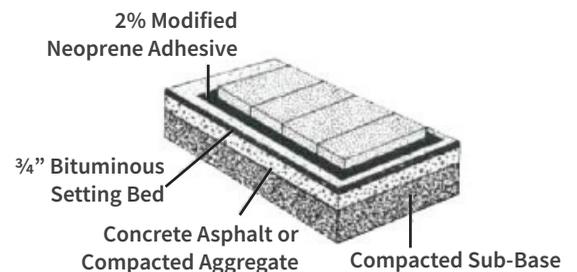

INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.