

Rustico 6x6 & 6x9

Small square and oversized brick shapes with a slightly dimpled surface. Chamfered edges and square corners make these pavers an elegant choice.



paver-shield™ pavers

paver-shield™ has a tight, smooth surface texture and will not expose heavy aggregate as it wears. Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are **guaranteed not to fade!**



Golden Brown Blend

Proud Distributor

WOODWARD
Landscape Supply



Rustico 6x6 & 6x9

	WIDTH	LENGTH	THICKNESS	PCS/SF	SF/PALLET	PCS/PALLET	LBS/PALLET
A	6"	6"	2 $\frac{3}{8}$ "	4	120	480	3,027
B	6"	9"	2 $\frac{3}{8}$ "	3	113	300	2,982

Sizes sold separately



ADOBE BLEND
(6x9 only)



AUTUMN BLEND*
(6x9 only)



BROWN



CAPPUCCINO BLEND*




CHARCOAL



CHESAPEAKE BLEND*



CRAB ORCHARD BLEND
(6x9 only)



FIRE ISLAND BLEND
(6x9 only)



GOLDEN BROWN BLEND
(6x9 only)



GRANITE CITY BLEND



GRAPHITE PEARL BLEND*
(6x9 only)



MARBLE BLEND*
(6x9 only)



OCEANIC BLUE*
(6x9 only)



OYSTER BLEND*



PENNSYLVANIA BLUE**
(6x9 only)



RAVEN*



SOUTH BAY BLEND*



TRAVERTINA*



WESTCHESTER BLEND


*Premium Color
**Deluxe Color




INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

CROSS-SECTION OF TYPICAL INSTALLATION

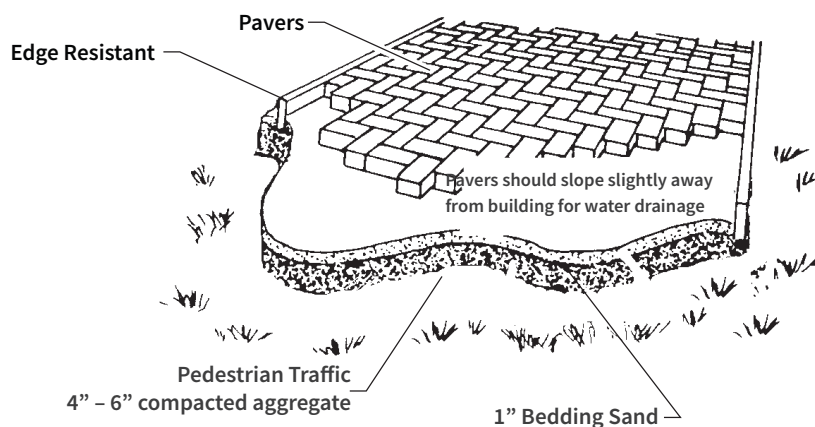

NICOLOCK PAVING STONE 1"-31/8" THICK

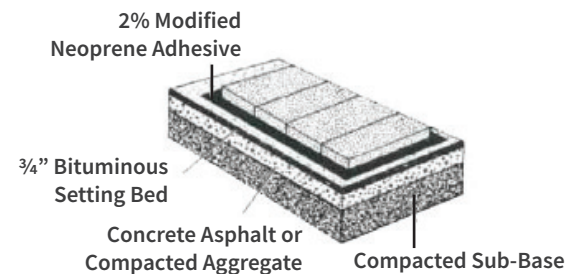

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.