Stone Ridge Contemporary

Multi-size rectangular shapes with a smooth and modern finish. Slightly chamfered edge.



paver-**shield™** pavers

paver-shield[™] has a tight, smooth surface texture and will not expose heavy aggregate as it wears. Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are guaranteed not to fade!



Proud Distributor






Stone Ridge Contemporary

	WIDTH	LENGTH	THICKNESS	PCS/SF S	SF/PALLET	PCS/PALLET	LBS/PALLET			
Α	4½"	9"	23/8"	3.8		130				
В	9"	9"	2%"	1.9	110	60	2,950	A	B	D
C	9"	13½"	23/8"	1.3		50			_	
D	18"	18"	23/8"	2.25	131	60	3,537 *sold as separate pallet			
Si	ze D sold separ	DBE BLEND	AUTI	UMN BLEND*	CAPP	UCCINO BLEND		EAKE BLEND*	CRAB ORCHARD BLEND	GOLDEN BROWN BLEND
	GRANIT	TE CITY BLEN	ID GRAPHIT	GRAPHITE PEARL BLEND*		HUDSON VALLEY BLEND		BLE BLEND*	OCEANIC 5*	OCEANIC BLUE*
	OYST	TER BLEND*	PI	ECONIC 6*	PENN	SYLVANIA BLUE*	* SOUTH	BAY BLEND*	TRAVERTINA*	WESTCHESTER BLEND

INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

CROSS-SECTION OF TYPICAL INSTALLATION

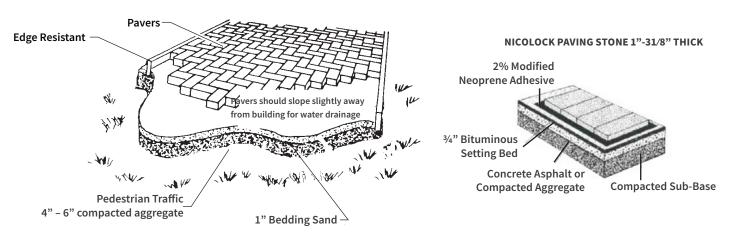

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.





*Premium Color

**Deluxe Color

naver-shield