

# The Montauk

Unique, multi-size, irregular shapes with a textured surface and textured edges. Makes a stunning accent and just as beautiful on its own. No spacer lugs needed.



Inlays | Borders | Circles



*Raven*

Proud Distributor

**WOODWARD**  
Landscape Supply



# The Montauk

	WIDTH	LENGTH	THICKNESS	SF/PALLET	PCS/PALLET	LBS/PALLET
<b>A</b>	2¾"	3¼"	2⅝"			
<b>B</b>	2¾"	4"	2⅝"			
<b>C</b>	3¼"	4"	2⅝"	65	630	1,663
<b>D</b>	3⅝"	4"	2⅝"			
<b>E</b>	4"	4"	2⅝"			

Sizes not sold separately



CHARCOAL



GRANITE CITY BLEND



OYSTER BLEND\*



RAVEN\*


\*Premium Color




## INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

## CROSS-SECTION OF TYPICAL INSTALLATION

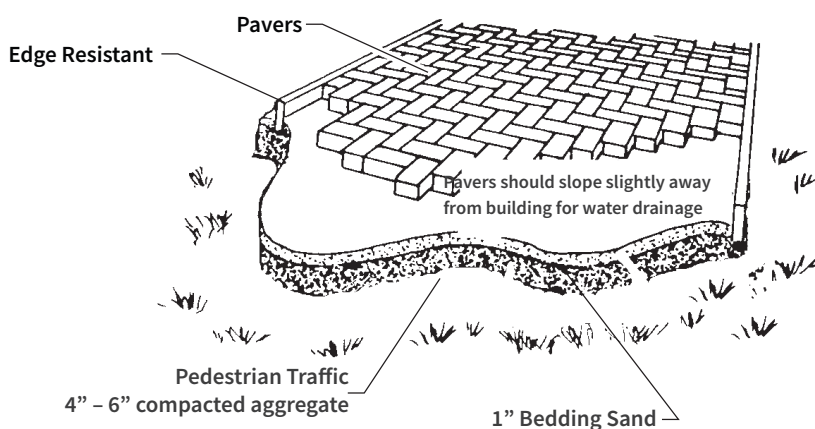

## NICOLOCK PAVING STONE 1"-31/8" THICK

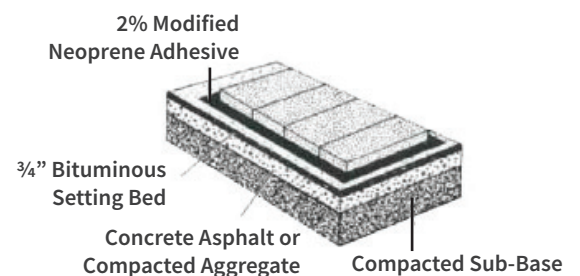

**NOTE:** All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

**CAUTION:** Always use a plate compactor with a pad when installing any textured paving stone.